




Daylight Par 4kW/2.5kW

■ SPECIFICATIONS

Identity No.	L04025DP
Capacity	4,000W / 2,500W
Lamp Bulb Voltage	200V / 115V
Protective Lens	Ø335mm (13-1/8 in.)
Par Lens	Ø300mm (11-3/4 in.)
Lamp Type	HMI 4000W SE / HMI 2500W SE
Color Temp.	5600K
Lamp Holder	G38
Stirrup	Ø28mm (1-1/8 in.) Spigot
Class / IP Rating	1 / IP 23
Max. Surface Temp.	190 °C
Max. Ambient Temp.	45 °C
Min. Distance to Illuminated Object	10 m
Min. Distance to Flammable Object	1 m
Operating Range	+45° ~ 0° ~ -45°
Weight (lamphead)	19.6 kg
Weight (with barndoor)	22.1 kg

■ DIMENSIONS (mm)

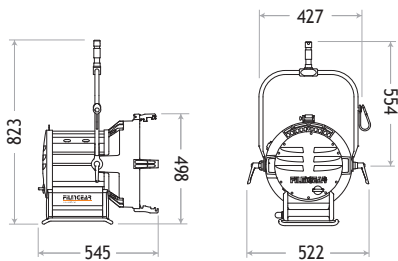

■ PHOTOMETRIC DATA

		10m	15m	20m			10m	15m	20m
4000W					2500W				
Spot (8°)	Lux	57318	25474	14329	Spot (8°)	Lux	54288	24128	13572
	Beam Ø	1.40 m	2.10 m	2.08 m		Beam Ø	1.40 m	2.10 m	2.80 m
Medium Flood (10° x 20°)	Lux	22574	10033	5643	Medium Flood (10° x 20°)	Lux	17827	7923	4457
	Beam Ø	1.75 x 3.53 m	2.62 x 5.29 m	3.50 x 7.05 m		Beam Ø	1.75 x 3.53 m	2.62 x 5.29 m	3.50 x 7.05 m
Wide Flood (20° x 45°)	Lux	7838	3479	1957	Wide Flood (20° x 40°)	Lux	3384	1504	846
	Beam Ø	3.53 x 8.28 m	5.29 x 12.43 m	7.05 x 16.56 m		Beam Ø	3.53 x 7.28 m	5.29 x 10.92 m	7.05 x 14.46 m
Super Wide Flood (40°)	Lux	4040	1976	1010	Super Wide Flood (30°)	Lux	2677	1190	669
	Beam Ø	7.28 m	10.92 m	14.46 m		Beam Ø	5.36 m	8.04 m	10.72 m
Frosted Super Flood (36°)	Lux	2677	1190	669	Frosted Super Flood (35°)	Lux	1326	589	332
	Beam Ø	6.50 m	9.75 m	13.00 m		Beam Ø	6.31 m	9.46 m	12.61 m

■ LAMPHEAD CONTENTS

Lamp Housing without Bulb (purple grey & silver color)

4-leaf Rotatable Barndoor with Safety Wire

Ø335mm (13-1/8 in.) Protective Lens

Set of 5 Par Lenses with Lens Case

Inlet Cable with Multi-Pin Connector

Stirrup with Ø28mm (1-1/8 in.) Spigot

Requires Electronic Ballast, Lamphead to Ballast Cable and Lamp Bulb

■ ACCESSORIES

Electronic Ballast V3 : 4kW/2.5kW

Lamphead to Ballast Cable : 7m (23 ft.) or 15m (49 ft.)

4-leaf Rotatable Barndoor

Set of 5 Par Lenses Ø300mm (11-3/4 in.) with Lens Case :

Spot, Medium Flood, Wide Flood, Super Wide Flood, Frosted Super Flood

Set of 4 Scrims Ø394mm (15-1/2 in.) : Full Single, Full Double, Half Single, Half Double

Scrim Bag

Safety Cable (for lamphead)

Safety Wire (for barndoor)